



Poseidon Hydrophilic Nitinol Guide Wire

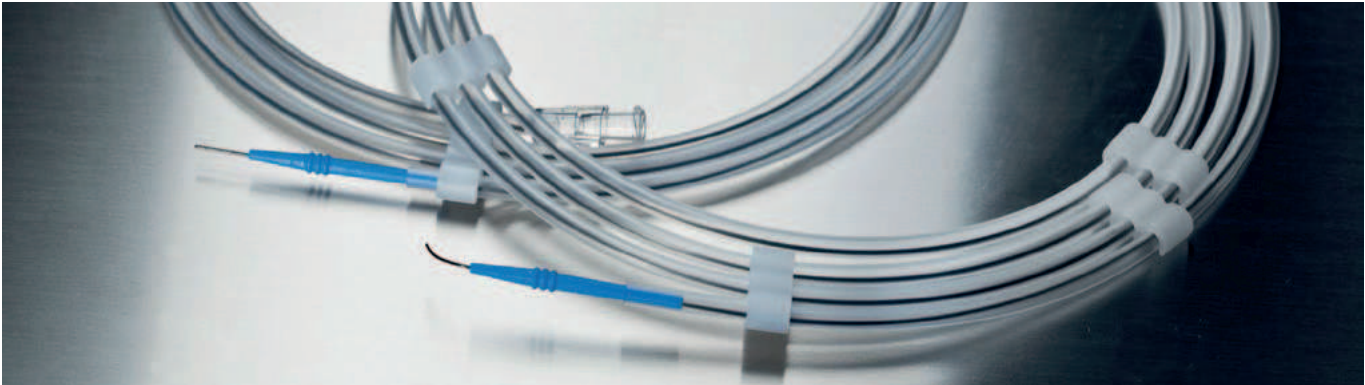

Dimensions

- Ø 0.018" / 0,46 mm
- Ø 0.025" / 0,64 mm
- Ø 0.032" / 0,81 mm
- Ø 0.035" / 0,89 mm
- Ø 0.038" / 0,97 mm

Length

30 – 260 cm

Surface

Hydrophilic coated - Black

Distal tip form

- Angled
- Straight
- Reshapable

Shaft stiffness

- Standard
- Stiff
- (Stiff not available in dim: 0.018")

Tip stiffness

- Standard
- Soft
- Floppy

Speciality Guide Wire:

Double Ended Flexible Tip

One end angled standard tip,
other end straight soft tip.
Stiff shaft stiffness.
Available dimension 0.035",
length 150 and 180 cm.

Customised products on request

Description of item code

Hy – N – S/R/A – ST/SO/F – 0xx – D/H – L
(example: Hy-N-A-ST-035-D-150)

DE	Double ended
HY	Hydrophilic coating
N	Nitinol core
S	Straight tip
A	Angled tip
R	Reshapable tip
ST	Standard tip stiffness
SO	Soft tip stiffness
F	Floppy tip stiffness
0xx	Diameter of the guide wire 018: 0.018" (0,46 mm) 025: 0.025" (0,64 mm) 032: 0.032" (0,81 mm) 035: 0.035" (0,89 mm) 038: 0.038" (0,97 mm)
H	Stiff shaft
D	Standard shaft
L	Length of the GW (from 30 – 260 cm)